

#### STYLAM INDUSTRIES LIMITED

#### CORPORATE OFFICE


S.C.O. 14, Sector 7-C, Madhya Marg, Chandigarh (UT) INDIA – 160019

**T:** +91-172-502 1666

**F:** +91-172-502 1495

**E:** info@stylam.com / inquiry@stylam.com

www.stylam.com

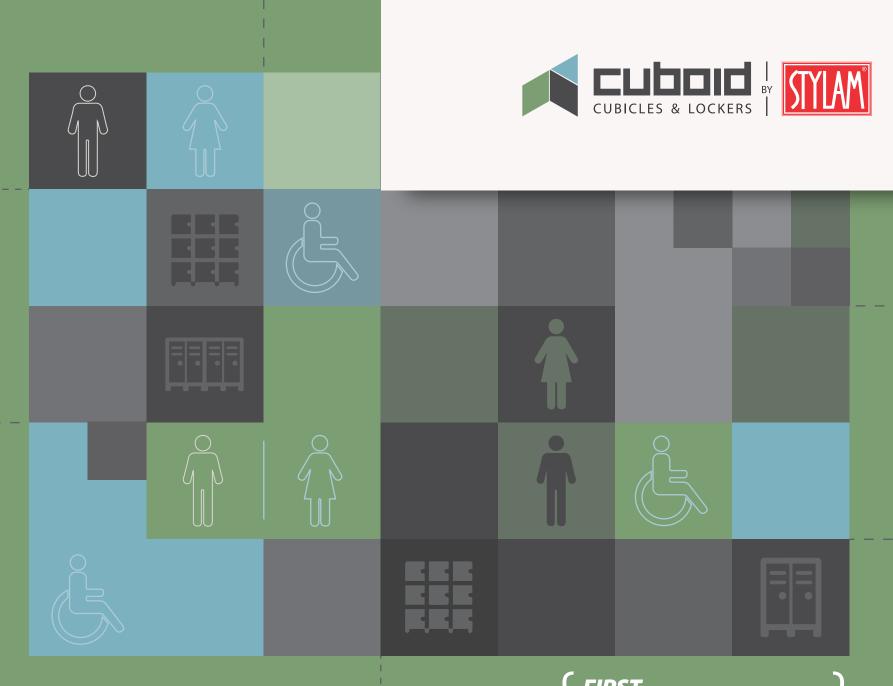

FIRST INDIAN MANUFACTURERS WITH 1860 X 4320 mm PANEL SIZE





#### VISION

To maintain and strengthen our position nationally and globally in Home Décor space with an array of new innovative products and adding value to life.

#### MISSION

We are committed to being the market leader by constantly innovating and delivering newer products and services. We aim to set the highest possible standard in quality, value and customer satisfaction.

32 years spent pursuing the ethos, 'what the spirit commits, perseverance completes' is what has shaped Stylam Industries Limited. Incepted in the year 1991 under the name of Golden Laminates Private Ltd, we started our success story by manufacturing decorative laminated sheets for both residential as well as industrial applications. Today, under the brand name STYLAM we have been combining industrious efforts, wide experience and innovative product customization to consistently size of laminate panels in India at 4320 x 1860 mm. Jointly our deliver quality and satisfaction to our clients. Dealing in post forming, anti-static, anti fungal and anti bacterial and chemical resistant laminates, Stylam is a name trusted for unmatched laminates that suit every budget. We are reputed to be a global entity with a Pan India presence and a thriving export market in more than 60 countries. Our major customers are in Europe, Far East, Middle East, Russia & North America and we continue to maintain robust YOY growth.

We have our state-of-the-art infrastructural plant at Panchkula in prestigious CE certification North India. Our manufacturing unit has world-class machines and equipments and assures maximum production of laminates in minimum time and our machines are operated by highly skilled and best in the class workmen. Since 32 years, we have been developing high quality products. Sophisticated moulds of various finishes imported from Europe are used in the production of our high quality laminates in accordance with

the universally acceptable European standards EN 438 series. Marking our silver jubilee celebrations is the inauguration of our second production facility, this is an ultra modern manufacturing plant designed by renowned Singapore based architects. The factory is spread over 25 acres and has been designed considering the most modern structural concepts. The facility will have a hydraulic press system capable of producing the biggest production facilities will ensure that we become the largest laminate producing group in India with a production capacity of over 17 million laminates.

We are an ISO 9001:2008 certified company, that itself shows our integrity, quality and reliability. Another feather in our cap is, we are recognized as an 'Export House' by the Government of India. Our unique design range and advanced quality efficiency of laminates has assisted the company in being awarded the for its compact laminates.





Company overview

CUBOID overview **01** 

Washroom Cubicles 11

Urinal Partitions 12

Support Grab Bars 12

Locker Systems 13

CUBOID advantages 16

Cubicle formats at a glance **17** 

Accessories Grocery 19

The Certificates **20** 

Technical Data **21** 

#### ABOUT **CUBOID**

Stylam presents CUBOID - a modular restroom and locker cubicle systems. CUBOID range is crafted using the finest materials and highest quality fixtures and fittings specially for heavy traffic areas where functionality and durability matters most. Our focus is on offering high-quality products that meet the specific demands of restroom applications in commercial, hospitality healthcare, education, transport, sports & wellness and leisure sectors.

CUBOID has an exhaustive range that is stylish, sturdy yet affordable and is available in various formats, shapes and surface designs. Besides, our cubicle systems come in special dimensions that take care of the needs of the physically challenged individuals. Anti-bacterial and anti-fungie properties of the laminate surface minimise the risk of spreading and transferring bacteria.

#### THE NOTION OF MODULAR CUBICLE SYSTEM

Modular cubicles are one of the most cost-efficient and modern concepts in restroom designing. These cubicles are made from Compact Grade Laminate (CGL). Compact Solid Grade laminate is a self-supporting decorative panel with a black core offering the same surface advantages as those of HP. This product is particularly apt for high humidity environments due to its inherent water resistance.

All Stylam Compact Laminates come with the Germ-Free protection Shield of "Anti-Bacterial & Anti-Fungie" at no additional cost. Perfect for sensitive (humidity, heat) and high traffic environments (Schools, hospitals etc.), the Germ-Free Shield ensures continuous protection against the development and proliferation of bacteria. Germ-free shield guarantees a safe and hygienic surface (99.9% effective).







#### **CUBICLE SYSTEMS**




#### disadvantages of wet system

- Cleaning of floor becomes difficult
- Dirt and stains easily settle down on the bottom because of its porous surface
- Tile designs can go out of production making its replacement difficult
- Since the grout joints are porous they can easily absorb pungent smell
- Loss of space-Usage of 6' x 6" thick walls result in loss of 3 sq.ft area per partition
- Load of building is high
- No means of natural ventilation is provided

#### advantages of dry system

- Economy of space-The partition panels are only 12mm or 18mm thick as compared to 150mm thick brick wall
- Economy of load-Partitioning systems reduces the load on building as compared to the usage of brick wall
- Reduced installation time-4 cubicles can be setup in a day
- Neatness-Since no wet work is involved
- Proper air ventilation access is provided in the designs
- Easy floor cleaning-Absence of corners doesn't let the dust to accumulate on the floor
- Vibrant range-Available in different colours and patterns

#### MATERIAL **CONFIGURATION**

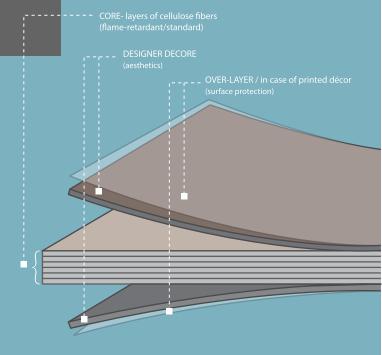

#### compact solid grade laminate board

resin poly condensation takes place to give the product that extra

#### hardware system



SS Legs



SS Shoe Box-up



Top Rail

CUBOID from STYLAM offers you an assortment of hardware fittings that endeavor to provide you with pleasing aesthetics and superior performance at an economical price. Crafted from high quality imported materials, these hardware fittings are available in polyamide, stainless steel and aluminum finishes. Within the stainless steel hardware, CUBOID offers you with two distinct

- SS Grade 304 is the most versatile '18/8' stainless steel. Its malleable and ductile nature is due to its superior forming and welding characteristics. While drawing thin sheets, intermediate and post weld annealing is not needed on this grade.
- SS Grade 316 with its added content of Molybdenum and higher amount of nickel, gives

you a better quality of stainless steel that's corrosion resistant and enduring. The SS 316 performs well in sub-zero conditions and aggressive

conditions like sea water, chloride contaminated media and acetic acid vapors. With higher strength, the SS 316 has better pitting, crevice and creep resistance to corrosion.

#### **PRO**series **DURA**

Simplicity is the ultimate sophistication, personified by the **DURA/PRO series** of cubicle systems. These systems come in high endurance compact laminates in multiple designs with solid stainless steel top rails and adjustable legs for efficient floor clearance.

All accessories like hooks, hinges, door knobs are in stainless steel. This series is perfect for high traffic areas like shopping malls, offices, or hospitals where one strives for simplicity, elegance and functionality.

#### PROPOSED APPLICATION AREAS

#### commercial

offices / shopping malls / commercial complex

hospitality restaurants


#### healthcare

hospitals / clinics

stadium / sports clubs / gym / club houses



## TOP VIEW SPECIAL FORMAT FOR SPECIALLY ABLED REGULAR FORMAT

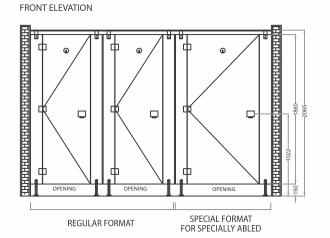

# 3 0

#### **DIMENSIONS**

1	Standard dimensions (mm)	Regular	Specially abled
	Total cubicle hight from ground	2065	2065
	Cubicle depth	1550	1550
	Pilaster height	1860	1860
	Pilaster width	150/300	150/300
	Door height	1860	1860
	Door width	600	900
	Top rail height	55	55
	Bottom gap	150	150
	HPL Thickness	12	12

#### THE STRUCTURE

- The adjustable legs (SS Grade 316) provided in the DURA series are anchored to the floor so that mid/end pilasters could be fixes on them.
- The base of leg is anchored to the floor with nylon plugs that are inserted into ground with SS screws
- The adjustable legs provide floor clearance of 150 mm.
- The top rail (SS Grade 304) is fixed to maintain alignment of all pilasters (mandatory in 12 mm model)
- Intermediate Panels (partitions) are fixed to rear wall and mid pilaster through SS U-channels.
- Maintaining the floor clearance of 150 mm, each door is mounted on mid/end pilaster with 3 hinges.
- Each door has one coat hook and door knob affixed.
- Door opening could be set either from inside or outside and could be fixed on left or right side.

#### **SPECIAL FEATURES**

- Adjustable SS legs
- SS Top rail arrangement for better stability, strength and aesthetics
- SS accessories



CUBICLES & LOCKERS

SS Top rail



Privacy indicator/Knob





Adjustable SS Legs



#### CUBICLE SYSTEMS

## PROseries MAX

Magnificent design is a way of life with the MAX/PRO series of cubicle systems.

These systems come with adjustable stainless steel legs that are anchored to the floor giving you high floor clearance for effective cleanliness. Anodized, aluminum top rails provide you with high endurance, functional capability. All cubicle accessories are in stainless steel. These rich in design, high strength, and economical systems are your go-to choice for high traffic areas.

#### PROPOSED APPLICATION AREAS

#### commercial

offices / shopping malls / commercial complex

hospitality restaurants

#### healthcare

hospitals / clinics

#### sports & wellness

stadium / sports clubs / gym spa / club houses


#### education

schools / collages / universities

#### CUBICLE SYSTEMS



## REGULAR FORMAT SPECIAL FORMAT FOR SPECIALLY ABLED

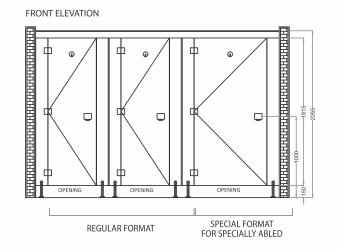

#### **DIMENSIONS**

Standard dimensions (mm)	Regular	Specially abled
Total cubicle hight from ground	2055	2055
Cubicle depth	1550	1550
Pilaster height	1860	1860
Pilaster width	150/300	150/300
Door height	1815	1815
Door width	600	900
Top rail height	45	45
Bottom gap	150	150
HPL Thickness	12	12

#### THE STRUCTURE

- The adjustable legs provided in the PRO series are anchored to the floor so that mid/end pilasters could be fixes on them.
- The base of leg is anchored to the floor with nylon plugs that are inserted into ground with SS screws
- The adjustable legs provide floor clearance of 150 mm.
- The extruded anodized aluminum top rail is fixed to maintain alignment of all pilasters
- Intermediate Panels (partitions) are fixed to rear wall and mid pilaster through aluminum U-channels.
- Maintaining the floor clearance of 150 mm, each door is mounted on mid/end pilaster with 3 hinges.
- Each door has one coat hook and door knob affixed.
- Each mid/end pilaster coming at the free end of the door is furnished with one privacy thump-turn and one door stopper channel to reduce the noise.
- Door opening could be set either from inside or outside and could be fixed on left or right side.

#### **SPECIAL FEATURES**

- Adjustable SS legs
- Natural Anodizing aluminum Top rail arrangement for better stability and economy
- SS accessories (hinges, coat hook, adjustable foot, lock set/latch indicator etc)





Privacy indicator/Knob

SS Coat hook



Anodizing aluminum Top rail



Adjustable SS Legs

.com

#### **PRO**series LORON

#### BOX-UP12mm

Enhance the beauty of your restrooms with the LORON/PRO series of cubicle systems. This 12 mm shoe box up series gives your restroom area an elegant, contemporary and clean look. Laminates for these cubicles come in magnificent colours and designs with stainless steel top rails that provide stability and strength. All accessories like hooks, hinges and door knobs are in stainless steel. This series works well for high end commercial spaces, specialty hospitals, spas and club houses.

#### PROPOSED APPLICATION AREAS

#### commercial

plush offices / high end shopping malls

hospitality restaurants / hotels

#### healthcare


high end hospitals

sports & wellness spa / club houses

#### CUBICLE SYSTEMS



## TOP VIEW REGULAR FORMAT FOR SPECIALLY ABLED

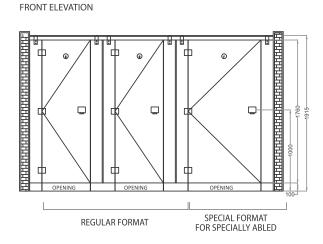

#### **DIMENSIONS**

Regular	Specially abled
1915	1915
1550	1550
1860	1860
150/300	150/300
1760	1760
600	900
55	55
100	100
12	12
	1915 1550 1860 150/300 1760 600 55

#### THE STRUCTURE

- SS Shoe Box (Grade 316) provided in the PRO series is anchored to the floor so that mid/end pilasters could be fixes on them.
- The pilaster is supported by L-bracket floor anchor bolt witch is concealed with 100 mm high SS Shoe
- The Shoe Box provides floor clearance of 100 mm.
- The top rail (SS Grade 304) is fixed to maintain alignment of all pilasters (mandatory in 12 mm model)
- Intermediate Panels (partitions) are fixed to rear wall and mid pilaster through SS U-channels.
- Maintaining the floor clearance of 100 mm, each door is mounted on mid/end pilaster with 3 hinges.
- Each door has one coat hook and door knob affixed.
- Door opening could be set either from inside or outside and could be fixed on left or right side.

#### **SPECIAL FEATURES**

- SS Shoe Box Up arrangement at bottom enhances the overall beauty of the restroom area
- SS Top rail arrangement for better stability and strength
- SS accessories







Privacy indicator/Knob

Coat hook



SS Top rail



SS Shoe Box Up - 12 mm compact board

## PROseries LANTO

#### BOX-UP18mm

Fine design sensibility coupled with magnificence has a new name with the LANTO/PRO series shoe box up cubicle system. Formulated with 18mm thick compact laminates that provide extra sturdiness and durability, one can do away with the top rails if desired. The cubicle accessories are in stainless steel with each door having one privacy thumb-turn and one door-stopper channel for a noise free experience. This series with its flexibility, durability and enhanced sturdiness works well in high end commercial spaces, plush offices, restaurants and luxury spas.

#### PROPOSED APPLICATION AREAS

commercial

plush offices / high end shopping malls

restaurants / hotels


healthcare high end hospitals

sports & wellness spa / club houses

#### CUBICLE SYSTEMS



## TOP VIEW 3000 1200 150 REGULAR FORMAT FOR SPECIAL FORMAT FOR SPECIALLY ABLED

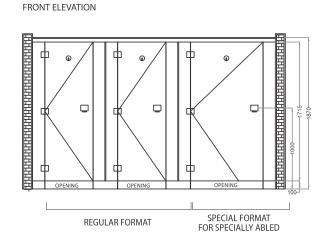

#### **DIMENSIONS**

Standard dimensions (mm)	Regular	Specially abled
Total cubicle hight from ground	1870	1870
Cubicle depth	1550	1550
Pilaster height	1860	1860
Pilaster width	150/300	150/300
Door height	1715	1715
Door width	600	900
Top rail height	45	45
Bottom gap	100	100
HPL Thickness	18	18

#### THE STRUCTURE

- SS Shoe Box (Grade 316) provided in the PRO series is anchored to the floor so that mid/end pilasters could be fixes on them.
- The pilaster is supported by L-bracket floor anchor bolt witch is concealed with 100 mm high SS Shoe Box
- The Shoe Box provides floor clearance of 100 mm.
- Intermediate Panels (partitions) are fixed to rear wall and mid pilaster through SS U-channels.
- Maintaining the floor clearance of 100 mm, each door is mounted on mid/end pilaster with 3 hinges.
- Each door has one coat hook and door knob affixed.
- Each mid/end pilaster coming at the free end of the door is furnished with one privacy thump-turn and one door-stopper channel to reduce the noise.
- Door opening could be set either from inside or outside and could be fixed on left or right side.

#### **SPECIAL FEATURES**

- SS Shoe Box Up arrangement at bottom enhances the overall beauty of the restroom area
- 18 mm thick Compact Board makes the entire setup sturdier
- SS Top rail arrangement for better stability and strength (optional in this model)
- SS accessories





Privacy indicator/Knob SS Coat h



SS Top rail



SS Shoe Box Up / 18 mm compact board

n

## PROseries HANG UP

Presenting the flawless floating format with smooth aesthetics and contemporary persona – The Hang UP/Pro series. This is a ceiling hung model to give your washroom the futuristic look along with a hassle free cleaning hygiene maintenance. The cubicle accessories are in stainless steel with each door having one privacy thumb-turn and a doorstopper channel for the noise free experience. This series with its clear-floor neat modern look and durability works well in premium commercial spaces and malls, sports and health clubs, gyms, spas etc.


#### PROPOSED APPLICATION AREAS


**commercial** premium offices / high end shopping malls


high end hospitals

sports & wellness spa / sports clubs / gym

#### CUBICLE SYSTEMS

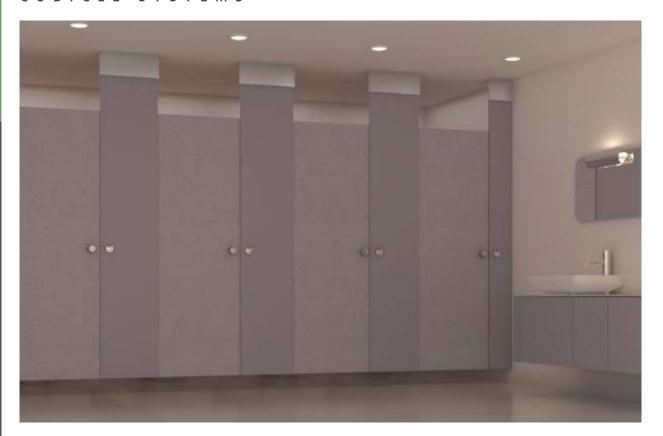

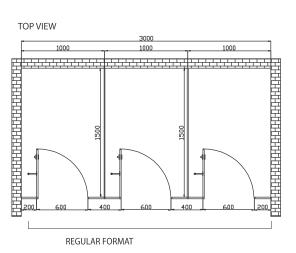

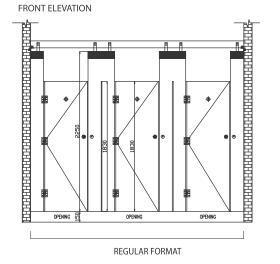




#### DIMENSIONS

Standard dimensions (mm)	Regular
Total cubicle hight from ground	2400
Cubicle depth	1550
Pilaster height	1860
Pilaster width	150/300
Door height	1715
Door width	600
Top rail height	45
Bottom gap	100
HPL Thickness	12

#### THE STRUCTURE

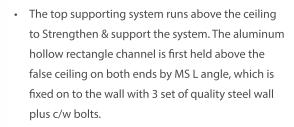



- The rectangle channel are distributed equally, in sync with the position of the pilaster and fixed into the hollow MS top rail using bolts and screws.
- Maintaining the floor clearance of 100 mm, each door is mounted on mid/end pilaster with 3 hinges.
- Each door has one coat hook and door knob affixed.
- Each mid/end pilaster coming at the free end of the door is furnished with one privacy thump-turn and one door-stopper channel to reduce the noise.
- Door opening could be set either from inside or outside and could be fixed on left or right side.

#### **SPECIAL FEATURES**


- Hang Up arrangement gives absolute ground clearing to the restrooms
- 12 mm thick Compact Board makes the entire setup sturdier
- SS accessories






Privacy indicator/Knob

SS Coat hook

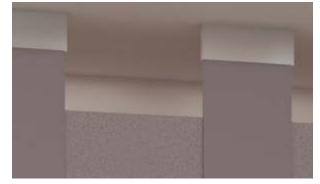

SS finish aluminum Top rail

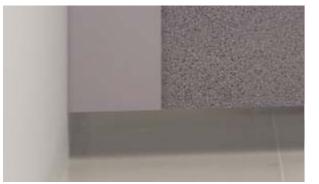

absolute ground clearance

tylam.com 07

## ROVE

ROVE - this new addition in the PRO series offers the clear floor concept that makes hygiene maintenance a fuss free task. This format of cubicles is formatted with 12mm compact laminates that provide sleekness and durability both. The cubicle accessories are in stainless steel with each door having one privacy thumb-turn and a doorstopper channel for the noise free experience. This series with its clear-floor neat contemporary look and durability works well in premium commercial spaces, sports arena, health clubs, gyms and spa.

#### PROPOSED APPLICATION AREAS

**commercial** premium offices / high end shopping malls

healthcare high end hospitals

sports & wellness spa / sports clubs / gym

#### CUBICLE SYSTEMS



## TOP VIEW FRONT ELEVATION FRONT ELEVATION REGULAR FORMAT REGULAR FORMAT

#### DIMENSIONS

Standard dimensions (mm)	Regular
Total cubicle hight from ground	2015
Cubicle depth	1550
Pilaster height	1860
Pilaster width	150/300
Door height	1715
Door width	600
Top rail height	45
Bottom gap	100
HPLThickness	12

#### THE STRUCTURE

The D shaped Hollow aluminum Toprail (Grade 5063 T-6) is held to the concrete wall on both the ends by MS L angle, which is fixed to the wall with 5S screws.

The front pilaster is fixed into the Toprail with SS screws inserted on the back side on Top rail

The ground clearance is 100 mm.

Intermediate Panels (partitions) are fixed to rear wall and mid pilaster through SS U-channels.

Maintaining the floor clearance of 100 mm, each door is mounted on mid/end pilaster with 3 hinges.

Each door has one coat hook and door knob affixed.


Each mid/end pilaster coming at the free end of the door is furnished with one privacy thump-turn and one door-stopper channel to reduce the noise.

 Door opening could be set either from inside or outside and could be fixed on left or right side.

#### **SPECIAL FEATURES**

- Hang Up arrangement gives absolute ground clearing to the restrooms
- 12 mm thick Compact Board makes the entire setup sturdier
- SS Top rail arrangement for better stability and strength
- SS accessories







Privacy indicator/Knob

SS Coat hook



SS finish aluminum Top rail



absolute ground clearance

#### **ACE**series NUVO

Less is more with the **NUVO/ACE series** cubicle series. These minimalistic design rest room cubicles are easy to construct, are economical exhibiting a simple sophistication. These systems come with adjustable nylon coated legs that give your restroom space a clean and neat look. Powder coated aluminum top rails gives you stability and durability at an economical price. The cubicle accessories like hinges, lockset indicator, hooks and door knobs are in nylon. Live minimalistic- live with NUVO.

#### PROPOSED APPLICATION AREAS

#### commercial

shopping malls / commercial complex

hospitality restaurants

#### healthcare

hospitals / clinics

#### sports & wellness

stadium / sports clubs / gym club houses


#### education

schools / collages / universities

#### CUBICLE SYSTEMS



## TOP VIEW REGULAR FORMAT FOR SPECIALLY ABLED

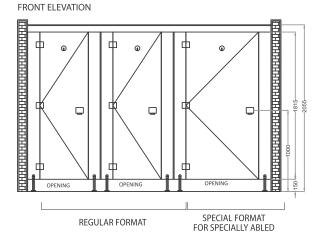

#### **DIMENSIONS**

Regular	Specially abled
2055	2055
1550	1550
1860	1860
150/300	150/300
1815	1815
600	900
45	45
150	150
12	12
	2055 1550 1860 150/300 1815 600 45


#### THE STRUCTURE


- The adjustable legs (Nylon PA-6) are anchored on the floor so that the mid/end pilaster can be fixed on them.
- The base of leg is anchored to the floor with nylon plugs that are inserted into ground with SS screws.
- The adjustable legs provide floor clearance of 150 mm.
- Powder coated Aluminum top rail (Grade 6063-T% Alloy) is fixed to maintain alignment of all pilasters.
- Intermediate Panels (partitions) are fixed to rear wall and mid pilaster through aluminum U-channels.
- Maintaining the floor clearance of 150 mm, each door is mounted on mid/end pilaster with 3 hinges.
- Each door has one coat hook and door knob affixed.
- Each mid/end pilaster coming at the free end of the door is furnished with one privacy thump-turn and one door stopper channel to reduce the noise.
- Door opening could be set either from inside or outside and could be fixed on left or right side.

#### **SPECIAL FEATURES**

- Adjustable nylon coated legs
- Powder coated aluminum Top rail arrangement for better stability, economy and aesthetics
- Nylon accessories (hinges, coat hook, adjustable foot, lock set indicator etc.)
- Nylon accessories available in three colour variants: White / Gray / Black







Privacy indicator/Knob

Nylon Coat hook



Powder coated aluminum Top rail



Adjustable Nylon Legs



#### **ACE**series **RORSO**

Today's multiplexes, large commercial spaces and hospitals bear the wear and tear of a heavy footfall in their restrooms. In such busy restrooms, one wants sturdiness with sensibility. The RORSO/ACE series is your answer to strength and durability. The strength of this system comes from its powder coated robust aluminum round poles that also double up to give your restroom a creative soft edge. With cubicle accessories in nylon, they are easy on maintenance. The top rail arrangement in aluminum gives you stability and economy.

#### PROPOSED APPLICATION AREAS

#### commercial

shopping malls / commercial complex

hospitality restaurants

#### healthcare

hospitals / clinics

#### sports & wellness

stadium / sports clubs / gym club houses


#### education

schools / collages / universities

#### CUBICLE SYSTEMS



## TOP VIEW REGULAR FORMAT FOR SPECIALLY ABLED

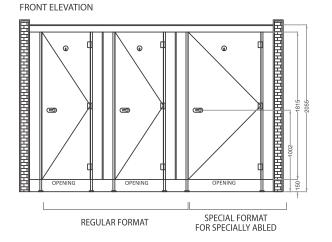

#### **DIMENSIONS**

Standard dimensions (mm)	Regular	Specially abled
Total cubicle hight from ground	2055	2055
Cubicle depth	1550	1550
Pilaster height	1860	1860
Pilaster width	150/300	150/300
Door height	1815	1815
Door width	600	900
Top rail height	45	45
Bottom gap	150	150
HPL Thickness	12	12

#### THE STRUCTURE

- Powder coated robust aluminum Round poles with foot anchored are on the floor so that the mid/end pilaster can be fixed on them.
- The base of round pole leg is anchored to the floor with nylon plugs that are inserted into ground with SS screws.
- The adjustable M Pole legs provide floor clearance of 150 mm.
- Powder coated Aluminum top rail (Grade 6063-T% Alloy) is fixed to maintain alignment of all pilasters.
- Intermediate Panels (partitions) are fixed to rear wall and mid pilaster through aluminum U-channels.
- Maintaining the floor clearance of 150 mm, each door is mounted on round pole with 3 hinges.
- The round pole is affixed rubber sponge to reduce the
- Each door has one coat hook and door knob affixed.
- Each mid/end pilaster coming at the free end of the door is furnished with one Latch Lock Set.
- Door opening could be set either from inside or outside and could be fixed on left or right side.

#### **SPECIAL FEATURES**

- Adjustable nylon/Aluminum coated M pole legs
- Powder coated aluminum Top rail arrangement for better stability, economy and aesthetics
- Nylon accessories (hinges, coat hook, adjustable foot, latch indicator etc.)
- Nylon accessories available in three colour variants: White / Gray / Black



Privacy indicator/Knob

CUBICLES & LOCKERS |

Nylon Coat hook



Powder coated aluminum Top rail



Adjustable nylon/Aluminum coated M pole legs



#### **ACE**series ZONA

The **ZONA/ACE series** of cubicle systems is your answer when aesthetics and ease are needed in renovation projects. Using existing intermediate brick walls, this system fits in perfectly with its door arrangement. The 12mm thick, compact board doors come in varied designs and colours. This system warps around matching pilaster, is slim and strong with high durability. They work well where speed of installation with minimal maintenance is needed in renovation projects.

#### PROPOSED APPLICATION AREAS

commercial

offices / commercial complex

hospitality

highway restuarants


healthcare clinics

sports & wellness stadium / sports clubs / gym / club houses


#### CUBICLE SYSTEMS



#### TOP VIEW

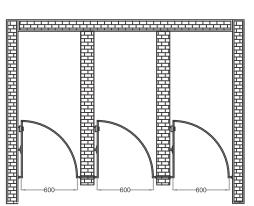

#### FRONT ELEVATION

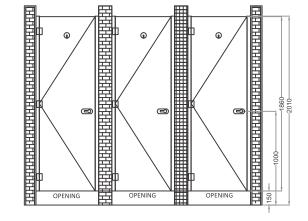



Regular

Specially abled

shall be as per

existing intermedia

brick walls setup.

**DIMENSIONS** 

Door width

Door hight

Bottom gap HPL Thickness

Total cubicle hight from ground


#### THE STRUCTURE

- Aluminum D-shaped poles are fixed in the wall on both sides with SS screws and wall plugs.
- Maintaining the floor clearance of 150 mm, each door is mounted on D-shaped pole with 3 hinges.
- The poles are affixed rubber sponge/lining to reduce the noise.
- Door opening could be set only from inside and could be fixed on left or right side.

#### **SPECIAL FEATURES**

- Doors made up of 12mm thick compact board
- Hardware and accessories available in Nylon + aluminum
- Slim and strong, highly durable system
- Wrap around matching pilaster
- Faster installation, maintenance friendly
- Nylon accessories available in three colour variants: White / Gray / Black



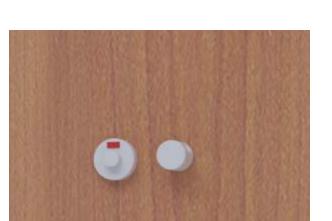

CUBICLES & LOCKERS

Privacy indicator/Knob



Coat hook





#### **ALPHA DIVIDER PANELS**

Restroom Divider Panels get a new name with CUBOID divider panels from the house of Stylam. These restroom Divider Panels (urinal partitions) come in vibrant colours and design, and are made with superior grade 12mm compact laminates that come with the seal of anti-bacterial and anti-fungie protection. Aside from hygiene, privacy is very important in these areas. Crafted as a single undivided piece with chamfered edges, these Divider Panels give your restroom space a clean and neat look. The material and colour can be perfectly attuned to the layout of the room and the cubicles.

#### PROPOSED APPLICATION AREAS

#### commercial

offices / shopping malls / commercial complex

#### hospitality

restaurants / hotels

#### healthcare

hospitals / clinics

#### sports & wellness

stadium / sports clubs / gym / spa / club houses

#### education

schools / collages / universities

#### URINAL PARTITIONS




#### THE STRUCTURE

- Each divider panel is equipped with SS L-clamp that attaches the divider to the wall.
- SU-304 screws are used for fixing the divider panel to the wall.
- The partition panels are manufactured using 12 mm thick compact laminate.
- As per international standards the gap of the divider from the ground should be 500-600 mm.

#### **DIMENSIONS**

Standard dimensions (mm)	Regular
Partition depth	550
Partition hight	1200
Gap from ground	500-600
HPL thickness	12

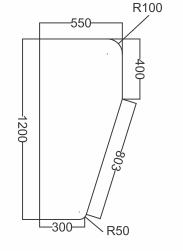


## SUPPORT GRAB BAR SYSTEMS



CUBOID Support Grab bar system is an adaptable tube and connector system that facilitates productive custom-made design for support grab bars, guide railing and staircases where vertical post fixing is essential. The range consists of anti-corrosive nylon fixtures and high quality aluminum fittings.

All the products have been designed to provide utmost hygiene, easy maintenance, anti-static surface, sturdiness and stability. These heavy-duty grab bars are manufactured in accordance to ADA guidelines to provide firmness and added assistance to physically challenged. Available in both left and right handed version with plugs and screws.



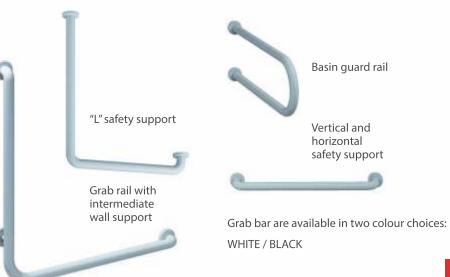



Are you looking for eclectic, ultra-modern, yet functional and durable locker systems?

Presenting, the Cuboid smart solution locker systems made with Stylam compact laminates. Available in varied colours, designs, sizes, formats and specifications, they are the perfect fit to your locker requirements, interiors and services. These systems are sturdy, durable, environment friendly and easy to use.

These durable locker systems adapt well in high humidity zones like gymnasiums, spas, sauna centers, fitness clubs, swimming pools, commercial environments and fitness centers. The Stylam laminates used in these systems come with the Germ-Free protection Shield of "Anti-Bacterial & Anti-Fungie". The Germ-Free Shield ensures continuous protection against the development and proliferation of bacteria and guarantees a safe and hygienic surface.

#### **KEY FEATURES**

- Exceptional hygiene: Anti-bacterial and anti-fungie properties of the laminate surface not just restrain the bacterial growth but also minimize the risk of spreading and transferring bacteria.
- Excellent resistance to vandalism
- Rust proof, scratch resistant and water resistant
- Faster and easy installation, maintenance friendly
- Excellent resistance to impact hence suitable for intensive usage

#### **APPLICATION AREAS**

#### **EDUCATION**

Schools/colleges Labs Library Staff room

#### **HEALTHCARE**

Hospitals Clinics

#### HOSPITALITY

Restaurants Hotels Resorts

#### **SPORTS & WELLNESS**

Swimming pools Stadium Sports clubs Gym

#### THE CHOICES

**1X** -1 door module

**2X** -2 door module

**3X** - door module

**4X** - door module

**5X** - door module

**Z** - interlocking module

#### **FINEST LOCKER SYSTEMS**

#### THE BASE

Within CUBOID locker systems, we offer three base mechanisms to rest your locker units on. Pick the right one that best suits your purpose.

- SS legs
- Compact laminate skirting
- Concrete base

#### THE **LOCKING MECHANISM**

Old timer, transitional or modern-day. We have alternatives for the diverse needs and preferences.

- Customer Lock
- Inbuilt Key-Lock
- Numeric Lock (key less)

#### THE **HINGES**

In CUBOID locker systems, the hinges integrated into the aluminum frames has patented and vandal-proof design that carries a lifetime warranty. The 175 degree opening angle of the door assists easy access. Each locker is self-ventilated around the perimeter of the door where it meets the frame.

#### THE **DOORS**, WALLS & PARTITIONS

The CUBOID locker systems has doors, walls and partition panels made from solid phenolic HPL for excellent durability and remarkable water resistance.

9mm HPL Compact laminate is used for shelves to ensure robust structure.

9mm HPL Compact laminate door comes with integrated hinge design.

Back and side panels are made of 3mm board complementing the overall assembly of the unit

#### THE **CHANNELS**

CUBOID locker systems' integrated frames, threaded connectors and 'plug & screw' assembly escapes the need for glue or permanent fastening. Efficient to ship, easy and quick to install, a smart retro-fit. The entire system could be easily disassembled or reassembled without compromising the core materials. This what awards CUBOID a completely modular locker system.

#### THE **CONSTRUCT**

Mid shelves are supported through aluminum half round channel at all four corners.

Aluminum half round channels are fitted on outer most channels.

As Economy Solution, we offer 6mm HPL compact laminate for doors and shelves. In this module the mid shelves are supported through aluminum half round channel at two corners while MSU-clip at other two corners. Aluminum half round channels fitted on outer most channels are absent in economy model.





Standard dimensions	mm
Height of locker unit	1830
Width of locker unit	300
Depth of locker unit	450
Height of base	100





Standard dimensions	mm
Height of locker unit	914
Width of locker unit	300
Depth of locker unit	450
Height of base	100





Standard dimensions	mm
Height of locker unit	608
Width of locker unit	300
Depth of locker unit	450
Height of base	100













Standard dimensions	mm
Height of locker unit	1327
Hanging height	500
Width of locker unit	300
Depth of locker unit	450
Height of base	100







## THE CUBOID ADVANTAGES







resistant to cigarette burns



impact resistant



quick installation



Environment



steam resistant



abrasion resistant



easy to





wide range of colours & designs



crack resistant












#### **THE CONSTRUCT**

SOLID COMPACT LAMINATE



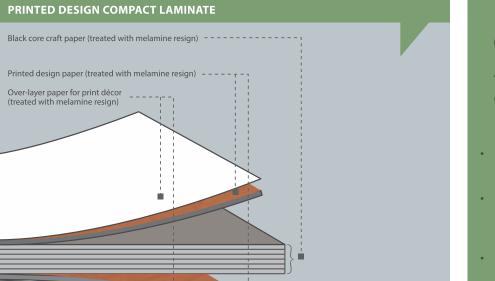


### Compact Laminates with properties



- Retards 99.9% of fungal and bacterial growth on contact with the laminate.
- Backed by Green Guard Certification, and now with the Anti-Bacterial & Anti-Fungie protection, it will improve the indoor air quality by leaps and bounds.
- Meets the standards of ASTM G21 09 and ISO 22196 2007, which is based on JIS Z 2801.

#### **WHYCUBOID**

- 29 years of experience in HPL
- extensive product range
- product innovation with top design
- top quality material and processing
- professional installation on site
- prompt and on-schedule delivery
- Affordable and smart solutions
- one-stop service
- quick quotation processing

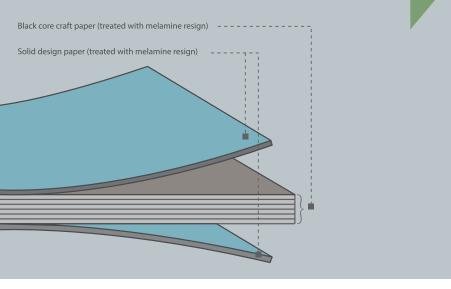


#### CUBICLE FORMATS AT A GLANCE




# TOP VIEW TOP VIEW FRONT ELEVATION REGULAR FORMAT FOR SPECIAL FORMAT FOR SPECIAL FORMAT FOR SPECIAL Y ABLED





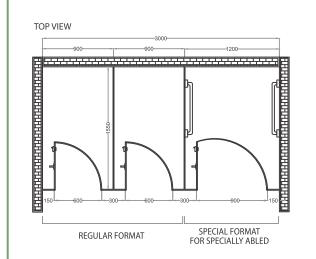


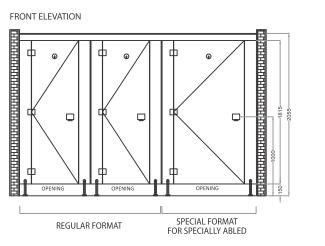





#### PROseries LORON



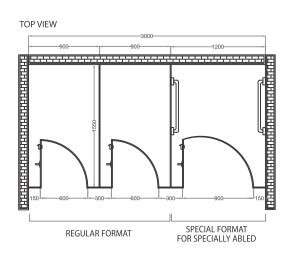


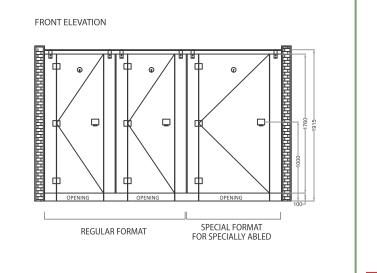


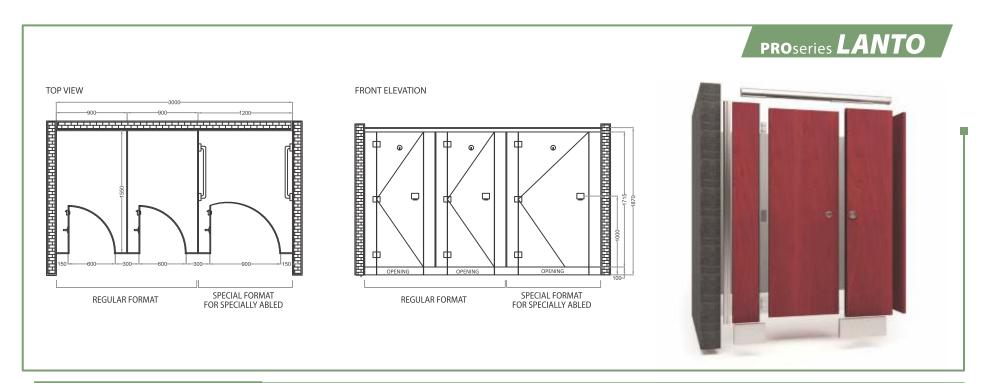


### PROseries HANGUP FRONT ELEVATION TOP VIEW REGULAR FORMAT REGULAR FORMAT




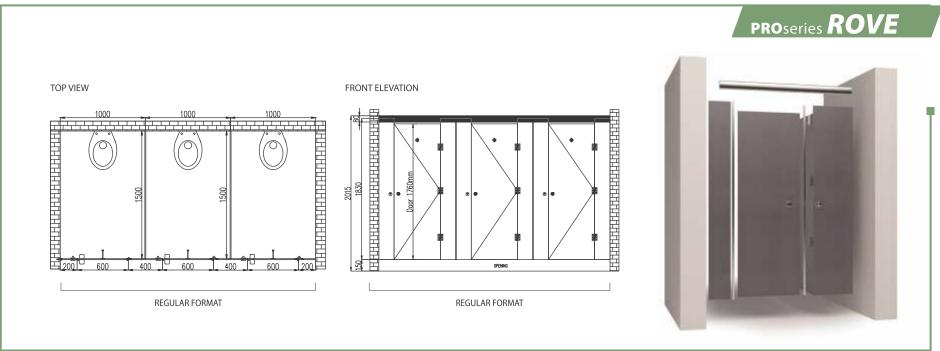

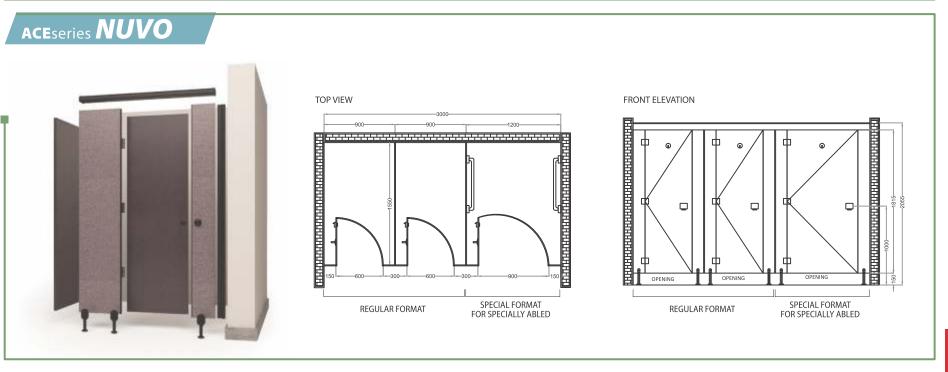

#### ACEseries RORSO

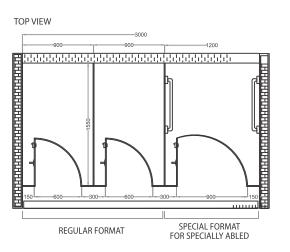


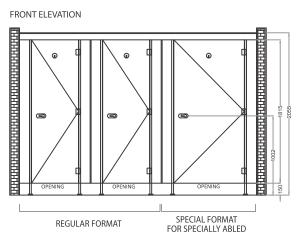




#### ACEseries **ZONA**





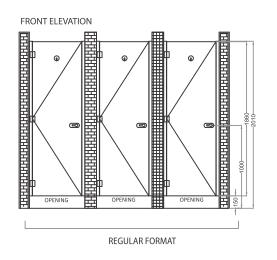





**D Pole Chanel** Material: Aluminum Used in: Zona



Material: SS/Aluminum Used in: Lanto, Max, Nuvo, Rorso



Lock Material: Nylon Used in: Zona, Rorso Colour options: white, grey, black



**F** Chanel Material: SS/Aluminum Used in: Dura, Max, Loron, Lanto, Nuvo, Rorso, Rove, Hangup



Material: SS Used in: Dura, Max



Lock Material: Nylon Used in: Nuvo Colour options: white, grey, black



**U** Chanel Material: SS/Aluminum Used in: Dura, Max, Loron, Lanto, Nuvo, Rorso, Rove, Hangup



Material: Nylon Used in: Nuvo Colour options: white, grey, black



**M Pole Foot** Material: Nylon, Alminium Used in: Rorso



**Round Top Rail** Material: SS Used in: Dura, Loron



**Shoe Box** Material: SS Used in: Loron (12mm), Lanto (18mm)



**Tabular Holder** Material: SS Used in: Dura, Loron

#### ACCESSORIES GROCERY



**Top Rail Cocer** Material: SS / Nylon Used in: Lanto, Nuvo, Rorso



**Coat Hook** Material: Nylon Used in: Nuvo, Rorso, Zona



**Door Knob** Material: SS / Nylor Used in: all models



End Connector
Material: SS
Used in: Dura, Loron



**Wall Bracket**Material: SS
Used in: Dura, Loron



HIng Material: SS / Nylon Used in: all models



Coat Hook Material: SS Used in: Dura, Max, Loron, Lanto

\_\_\_\_\_\_



L Clamp Material: SS Used in: Alpha Urinal Partitions



#### THE CERTIFICATES































### TECHNICAL DATA



#### STYLAM COMPACT LAMINATES - CGS/CGF

Compact High Pressure Laminates (HPL) as per EN 438-4: 2016, are available in the standard CGS and in the flame retardant CGF types on demand. When these laminates are self-supporting they are ready for installation.


SR. NO.	PROPERTIES	TEST METHOD	ATTRIBUTES OF PERFORMANCE	UNIT OF MEASUREMENT	RESULTS (AS PER EN 438-4)
			EN-438 Laminate Classification		CGS/CGF
1	SURFACE QUALITY				
1.1	Surface quality	EN 438-2.4	Spots, dirt and similar surface defects	mm²/m²	≤1
1.1	Surface quality	LIN 436-2.4	Fibres, hairs and scratches	mm/m²	≤ 10
2	DIMENSIONAL PROPERTIES				
				mm	2 ≤ T < 3 : ± 0,2
				mm	3 ≤ T < 5 : ± 0,3
				mm	5 ≤ T < 8 : ± 0,4
2.1	Thickness	EN 438-2.5	Thickness tolerance	mm	8 ≤ T < 12 : ± 0,5
				mm	12 ≤ T < 16 : ± 0,6
				mm	16 ≤ T < 20 : ± 0,7
				mm	20 ≤ T < 25 : ± 0,8
2.2	6:	5N, 400 0 C	1 1 11	mm	25 ≤ T : ± 1,3
2.2	Size	EN 438-2.6	Length and width	mm	+ 10 / - 0
2.4	Straightness of edges	EN 438-2.7 EN 438-2.8	Straightness of edges	mm/m mm/m	≤ 1,5 ≤ 1,5
2.4	Squareness	EN 438-2.8	Squareness	mm/m mm/m	≤ 1,5 2,0 ≤ T < 6,0 : 8
2.5	Flatness	EN 438-2.9	Flatness (measured on full-size sheet)	mm/m	6,0 ≤ T < 10,0 : 5
2.5	riauless	LIN 436-2.5	riatiless (illeasured oil full-size sheet)	mm/m	10,0 ≤ T : 3
3	PHYSICAL PROPERTIES			11111/111	10,0 5 1 . 3
					Unicolours - ≥ 150
3.1	Resistance to surface wear	EN 438-2.10	Wear Resistance - Initial Point	Revolutions	Printed Décor - ≥ 125
			Mass increase - 2 ≤ T < 5 mm	%	CGS - ≤ 5 , CGF - ≤ 7
			Mass increase - T ≥ 5 mm	%	CGS - ≤ 2 , CGF - ≤ 3
22	Resistance to immersion in	EN 420 2 12	Thickness increase - 2 ≤ T < 5 mm	Rating	CGS - ≤ 6 , CGF - ≤ 9
3.2	boiling water	EN 438-2.12	Thickness increase - T ≥ 5 mm	Rating	CGS - ≤ 2 , CGF - ≤ 6
			Appearance - Gloss Finish	Rating	≥ 3
			Appearance - Other Finishes	Rating	≥ 4
3.3	Resistance to water vapour	EN 438-2.14	Appearance - Gloss Finish	Rating	≥3
3.3	Resistance to water vapour	EN 450-2.14	Appearance - Other Finishes	Rating	≥ 4
3.4	Resistance to dry heat	EN 438-2.16	Appearance - Gloss Finish	Rating	≥ 3
3.4	(160°C)	LIV 430-2.10	Appearance - Other Finishes	Rating	≥ 4
			Cumulative dimensional change - 2 ≤	L %	≤ 0,40
3.5	Dimensional stability at	EN 438-2.17	T<5mm	T %	≤ 0,80
	elevated temperatures		Cumulative dimensional change - T ≥	L %	≤ 0,30
			5mm	Т%	≤ 0,60
3.6	Resistance to impact with	EN 438-2.21	Indent. dia. 10mm 2 ≤T<6 mm - Drop	mm	≥ 1400
	large diameter ball		Indent. dia. 10mm T≥6mm - Drop Height	mm	≥ 1800
3.7	Resistance to crazing	EN 438-2.24	Appearance	Rating	≥ 4
3.8	Resistance to scratching	EN 438-2.25	Appearance - Smooth Finishes	Rating	≥ 2
			Appearance - Textured Finishes	Rating	≥3
3.9	Resistance to staining	EN 438-2.26	Appearance - Group 1 & 2	Rating	≥5
2.40	Links for the conference (Management)	EN 420 2 27	Appearance - Group 3	Rating	≥ 4
3.10	Light fastness (Xenon arc)	EN 438-2.27	Contrast	Grey scale rating	4 to 5
3.11	Flexural modulus	EN ISO 178 EN ISO 178	Stress	Mpa	≥ 9000
3.12	Flexural strength Density		Stress	Mpa gm/cm³	≥ 80
3.13	· · · · · · · · · · · · · · · · · · ·	EN ISO 1183	Density		≥ 1,35
	FIRE PERFORMANCES Fire Reaction Classification,		Test as per EN 13823 (SBI test) and EN ISC Classification - 3 ≤ T < 6 mm	Rating	B - s2, d0
4.1	CGF	EN 13501	Classification - 3 ≤ 1 < 6 mm	Rating	B - s2, d0 B - s1, d0
$\vdash$	Fire Reaction Classification,		Classification - 6 ≤ T < 10 mm	Rating	D - s1, d0
4.2	CGS	EN 13501	Classification - T ≥ 10 mm	Rating	B - s1, d0
5	OTHER PROPERTIES		Classification - 1 2 10 mm	Nating	D - 31, GO
		EN 438-			
5.1	Release of Formaldehyde	7.4.11.1	Classification	Rating	E1
		,,,, <u>,,,</u>			

#### Disclaime

This Product Technical Sheet gives technical information relevant to the performance of product as tested by STYLAM and External Certified testing agencies. STYLAM reserves the right to change product composition and characteristics at any time.



	DURA	
S. NO.	ITEM DESCRIPTION	Approved Make
1.00	PARTITIONS AND ASSOCIATED WORKS	
1.00	Toilet Cubical	DURA BY STYLAM
	Providing & fixing STYLAM CUBOID DURA Toilet Cubicle (of following standard dimension which includes 600mm door size width) made of heat, bacteria, water, chemical, scratch, impact and anti bacterial resistant 12mm thick solid compact laminate panels tested by national test house. Finish of the compact laminate should be Suede, which includs doors, pilasters & intermediate panels finished with approved texture/shade as per the detail drawings & as per IS 2046 (Indian Standard) and as per fire retardant BS-476/97 standard. The product should have Green Guard Certificate.  This also includes providing and fixing in position necessary hardware made out of Stainless steel (Grade 304) as per manufacturer's specifications & Architects instructions like (1) Door Knob, (2) Gravity Hinges, (3) Thumb turn lockset with Occupancy indicators, (4) Coat hooks with Door stopper (5) U-Channels, (6) Adjustable Legs/pedestal(Grade 316), (7) Top rail with Corner conntector (8) Rubber noise deafening tape, (9) Screws & wall Plugs.  The top fitting should consist of SS round top rail which will get fixed with pilasters, with SS panel tube holder, SS corner bend (connected with top rail) will be used on the corner of cubicle in absence of brick wall, SS wall fixing is used only on the wall which will hold the ss top rail.  All screws will of 304 Grade in stainless steel with satin finish. All pilasters are supported by stainless steel Bottom Cladding. The base of the stainless steel bottom cladding will be anchored to the floor with a clearance height upto 150mm.	
1.01	Toilet Cubicle with standard dimension of 2065mm Height x 1000mm Width x 1550mm Depth, which includes 600mm door size width).	
1.02	Toilet Cubicle I-Shape (Front Partition) with standard dimension of 2065mm Height x 1000mm Width which includes 600mm door size width).	



#### MAX

#### BILL OF QUANTITIES FOR TOILET BLOCK WORK

S. NO.	ITEM DESCRIPTION	APPROVED	BASIC	REMARKS	QUANTITY	UNIT	RATE	AMOUNT
		MAKE	PRICE	FLOOR	TOTAL			
1.00	PARTITIONS AND ASSOCIATED WORKS							
1.00	Toilet Cubical							
	Providing & fixing STYLAM - CUBOID - MAXToilet Cubicle (of following standard dimension which includes 600mm door size width) made of heat, bacteria, water, chemical, scratch, impact and anti bacterial resistant 12mm thick solid compact laminate panels tested by national test house. Finish of the compact laminate should be Suede, which includs doors, pilasters & intermediate panels finished with approved texture/shade as per the detail drawings & as per IS 2046 (Indian Standard) and as per fire retardant BS-476/97 standard. The product should have Green Guard Certificate.  This also includes providing and fixing in position necessary hardware made out of Stainless steel (Grade 304) & Aluminium powder coated top rail as per manufacturer's specifications & Architects instructions like (1) SS Door Knob, (2) SS Gravity hinges, (3) SS Thumb turn lockset indicators, (4) Aluminum Powder Coated Top Rail, (5) SS Coat Hooks, (6) SS U-Channels, (7) SS Adjustable Foot, (8) Noise Deafening Tape etc. (9) Screws & wall Plugs.  The top fitting should consist of Aluminium Powder Coated top rail which will get fixed with Mid & End pilasters.  All other hardware & screws will of stainless steel in 304 Grade with satin finish. Top rail is extruded Aluminium will be powder coated or anodized (Grade 6063 Micron Aluminium). All pilasters are supported by stainless steel adjustable footing with non corrosive steel inserts.	MAX BY STYLAM						
1.01	Toilet Cubicle with standard dimension of 2055mm Height x 1000mm Width x 1550mm Depth, which includes 600mm door size width).					Nos		
1.02	Toilet Cubicle I-Shape (Front Partition) with standard dimension of 2055mm Height x 1000mm Width which includes 600mm door size width).					Nos		



#### LORON

#### BILL OF QUANTITIES FOR TOILET BLOCK WORK

S. NO.	ITEM DESCRIPTION	APPROVED	BASIC	REMARKS	QUANTITY	UNIT	RATE	AMOUNT
5. NO.	ITEM DESCRIPTION	MAKE	PRICE	FLOOR	TOTAL	UNII	KAIE	AMOUNT
1.00	PARTITIONS AND ASSOCIATED WORKS							
1.00	Toilet Cubical							
	Providing & fixing STYLAM CUBOID LORON Toilet Cubicle (of following standard dimension which includes 600mm door size width) made of heat, bacteria, water, chemical, scratch, impact and anti bacterial resistant 12mm thick solid compact laminate panels tested by national test house. Finish of the compact laminate should be Suede , which includs doors, pilasters & intermediate panels finished with approved texture/shade as per the detail drawings & as per IS 2046 (Indian Standard) and as per fire retardant BS-476/97 standard. The product should have Green Guard Certificate.  This also includes providing and fixing in position necessary hardware made out of Stainless steel (Grade 304) as per manufacturer's specifications & Architects instructions like (1) Door Knob, (2) Gravity Hinges, (3) Thumb turn lockset indicators, (4) Coat hooks, (5) U-Channels, (6) SS-Shoe Box Plate (7) MS-Base Plate, (8) Top rail with Corner conntector (9) Rubber noise deafening tape (10) Screws & wall Plugs.  The top fitting should consist of SS round top rail which will get fixed with pilasters, with SS panel tube holder, SS corner bend (connected with top rail) will be used on the corner of cubicle in absence of brick wall, SS wall fixing is used only on the wall which will hold the ss top rail.  All screws will of 304 Grade in stainless steel with satin finish. All pilasters are supported by stainless steel Bottom Cladding. The base of the stainless steel bottom cladding will be anchored to the floor with a clearance height upto 110mm.	LORON BY STYLAM						
1.01	Toilet Cubicle with standard dimension of 1915mm Height x 1000mm Width x 1550mm Depth, which includes 600mm door size width).					Nos		
1.02	Toilet Cubicle I-Shape (Front Partition) with standard dimension of 1915mm Height x 1000mm Width which includes 600mm door size width).					Nos		

#### LANTO

#### BILL OF QUANTITIES FOR TOILET BLOCK WORK

C NO	ITEM DESCRIPTION	APPROVED	BASIC	REMARKS	QUANTITY	LINUT	DATE	AMOUNT
S. NO.	ITEM DESCRIPTION	MAKE	PRICE	FLOOR	TOTAL	UNIT	RATE	AMOUNT
1.00	PARTITIONS AND ASSOCIATED WORKS							
1.00	Toilet Cubical							
	Providing & fixing STYLAM CUBOID LANTO Toilet Cubicle (of following standard dimension which includes 600mm door size width) made of heat, bacteria, water, chemical, scratch, impact anti bacterial resistant 18mm thick solid compact laminate panelstested by national test house. Finish of the compact laminate should be Suede, which includs doors, pilasters & intermediate panels finished with approved texture/shade as per the detail drawings & as per IS 2046 (Indian Standard) and as per fire retardant BS-476/97 standard. The product should have Green Guard Certificate.  This also includes providing and fixing in position necessary hardware made out of Stainless steel (Grade 304) as per manufacturer's specifications & Architects instructions like (1) Door Knob, (2) Gravity Hinges, (3) Thumb turn lockset indicator, (4) Coat hook, (5) U-Channels, (6) SS-Shoe Box Plate (7) MS-Base Plate, (8) Rubber noise deafening tape (9) Screws & wall Plugs.  All screws will of 304 Grade in stainless steel with satin finish. All pilasters are supported by MS-Base steel Bottom Cladding with Stainless Steel Shoe Box Plate. The base of the stainless steel shoe box will be anchored to the floor with a clearance height upto 110mm. Fixing of intermediate panels to the wall shall be stainless steel 'L' – Bracket or stainless U-Channel section are fixed into wall with screw inserts.	LANTO BY STYLAM						
1.01	Toilet Cubicle with standard dimension of 1870mm Height x 1000mm Width x 1550mm Depth, which includes 600mm door size width).							
1.02	Toilet Cubicle I-Shape (Front Partition) with standard dimension of 1870mm Height x 1000mm Width which includes 600mm door size width).							



#### HANGUP

#### BILL OF QUANTITIES FOR TOILET BLOCK WORK

S. NO.	ITEM DESCRIPTION	APPROVED	BASIC	REMARKS	QUANTITY	UNIT	RATE	AMOUNT
		MAKE	PRICE	FLOOR	TOTAL			
1.00	PARTITIONS AND ASSOCIATED WORKS							
1.00	Toilet Cubical							
	Supplying & fixing in position Stylam-Toilet Cubicle (of following standard dimension which includes 600mm door size width) made of heat, bacteria, water, chemical, scratch, impact and anti bacterial resistant 12mm &18mm thick solid compact laminate panels tested by national test house. Finish of the compact laminate should be Suede , which includs doors, pilasters & intermediate panels finished with approved texture/shade as per the detail drawings & as per IS 2046 (Indian Standard) and as per fire retardant BS-476/97 standard. The product should have Green Guard Certificate.  This also includes providing and fixing in position necessary hardware made out of Stainless steel (Grade 304) & With MS Supporting systems (1) SS Door Knob, (2) SS Gravity hinges, (3) SS Latch Indicator, (4) MS Top Support , (5) SS Coat Hook, (6) SS U-Channels, (7) SS-Shoe Box Plate , (8) Noise Deafening Tape etc. (9) Screws & wall Plugs.  The top supporting system will run above the ceiling to Strengthen & support the system, it will be sattled on end wall with MS 'L' angles Mid & End pilasters will be fixed with the top support.  All other hardware & screws will of stainless steel in 304 Grade with satin finish.	HANGUP BY STYLAM						
1.01	Toilet Cubicle with standard dimension Front 18mm thick with 2400 Height x 1000mm Width (Door Size 600mmx1830mm), Partition 12mm thick 1550mm Depth x 1930mm height (Including gap of 100mm), which includes 600mm door size width).							
1.02	Toilet Cubicle I-Shape (Front Partition) with standard dimension of 18mm thick, 2400mm Height x 1000mm Width, which includes 600mm x 1830mm door size width).							

	ROVE									
	BILL OF QUANTITI	ES FOR TOILET E	BLOCK WORK							
S. NO.	ITEM DESCRIPTION	APPROVED MAKE	IMAGE							
1.00	PARTITIONS AND ASSOCIATED WORKS									
1.00	Toilet Cubical									
	Supplying & fixing in position Stylam Toilet Cubicle (of following standard dimension which includes 600mm door size width) made of heat, bacteria, water, chemical, scratch impact and anti bacterial resistant 12mm thick solid compact laminate panels tested by national test house. Finish of the compact laminate should be suede, which includes doors, pilasters & intermediate panels finished with approved texture/shade as per the detail drawings & as per IS 2046 (Indian Standard) and as per fire retardant BS-476/97 standard. The product should have Green Guard Certificate.  TThis also includes providing and fixing in position necessary hardware made out of Aluminium (Grade -6063-T6) & SS 304 GRADE with Aluminium supporting systems (1) Door Knob, (2) Gravity Hinges, (3) Latchlock indicators, (4) Coat hooks, (5) U-Channels, (6) Top rail, (7) Door stopper channel, (8) Noise deafening tape etc (9) Screws (stainless steel in 304 Grade with satin finish)& wall Plugs.  The top supporting system will run on the concrete wall to strengthen & support the systems,it will be sattled on end wall with MS 'L' angles Mid & End pilasters will be fixed with the top support	ROVE BY STYLAM								
1.01	Toilet Cubicle with standard dimension of 2015mm Height x 1000mm Width x 1550mm Depth, which includes 600mm door size width).									
1.02	Toilet Cubicle I-Shape (Front Partition) with standard dimension of 2015mm Height x 1000mm Width which includes 600mm door size width).									
All aspec	ts specified by the manufactures, Stylam Model or equivalent.									



	BILL OF QUANTITIES FOR TOILET BLOCK WORK									
5 NO	ITTM DESCRIPTION	APPROVED	BASIC PRICE	REMARKS	QUANTITY			AMOUNT		
S. NO.	ITEM DESCRIPTION	MAKE		FLOOR	TOTAL	UNIT	RATE	AMOUNT		
1.00	PARTITIONS AND ASSOCIATED WORKS									
1.00	Toilet Cubical									
	Providing & fixing STYLAM CUBOID-NUVO Toilet Cubicle (of following standard dimension which includes 600mm door size width) made of heat, bacteria, water, chemical, scratch, impact and anti bacterial resistant 12mm thick solid compact laminate panels, Finish of the compact laminate should be Suede / *Raw Silk, which includs doors, pilasters & intermediate panels tested by national test house. finished with approved texture/shade as per the detail drawings & as per IS 2046 (Indian Standard) and as per fire retardant BS-476/97 standard. The product should have Green Guard Certificate.  This also includes providing and fixing in position necessary hardware made out of Nylon Polyamide Grade-6 & Aluminium powder coated top rail as per manufacturer's specifications & Architects instructions like (1) Door Knob, (2) Gravity Hinges, (3) Thumb turn lockset indicator, (4) Aluminum Top Rail, (5) Coat Hook, (6) U-Channels, (7) Adjustable Foot, (8) Noise Deafening Tape (9) Screws & wall plugs etc.  The top fitting should consist of Aluminium Powder Coated top rail which will get fixed with Mid & End pilasters.  All screws will of 304 Grade in stainless steel with satin finish. Top rail is extruded Aluminium will be powder coated or anodized (Grade 6063 Micron Aluminium). All pilasters are supported by grade-6 Nylon Polyamide Thermoplastic palm design pedestal footing with non	NUVO BY STYLAM								

corrosive steel inserts. The base diameter 65mm and neck diameter of 33mm anchored to the floor with grade 304 satin finish stainless steel screws with push fit capping at a clearance height of 150mm. Model is Heat and Bacteria Resistant Polyamide in which aluminium U-Channel

Toilet Cubicle with standard dimension of 2055mm Height x 1000mm Width x 1550mm Depth, which includes 600mm door size width).

Toilet Cubicle I-Shape (Front Partition) with standard dimension of 2055mm Height x 1000mm Width which includes 600mm door size

will be used for the fixing of intermediate panels to the wall.

1.02

width).

NUVO

#### RORSO

#### BILL OF QUANTITIES FOR TOILET BLOCK WORK

S. NO.	ITEM DESCRIPTION	APPROVED	BASIC	REMARKS	QUANTITY	UNIT	RATE	AMOUNT
5. NO.	ITEM DESCRIPTION	MAKE	PRICE	FLOOR	TOTAL	UNII	KAIE	AMOUNT
1.00	PARTITIONS AND ASSOCIATED WORKS							
1.00	Toilet Cubical							
	Providing & fixing STYLAM CUBOID RORSO Toilet Cubicle (of following standard dimension which includes 600mm door size width) made of heat, bacteria, water, chemical, scratch, impact and anti bacterial resistant 12mm thick solid compact laminate panels tested by national test house. Finish of the compact laminate should be Suede, which includs doors, pilasters & intermediate panels finished with approved texture/shade as per the detail drawings & as per IS 2046 (Indian Standard) and as per fire retardant BS-476/97 standard. The product should have Green Guard Certificate.  This also includes providing and fixing in position necessary hardware made out of Nylon Polyamide Grade-6 & Aluminium powder coated top rail as per manufacturer's specifications & Architects instructions like (1) Verticle Post Door Channel (anodized), (2) Hinges Adaptors, (3) Gravity Hinges (4) Privacy Thumbturn c/w Occupancy Indicator, (5) Coat Hook, (6) Door Knob, (7) Noise Deafening Tape (8) Screws & wall Plugs.  The Top rail should be extruded Aluminium which should be powder coated or anodized (Grade 6063 Micron Aluminium). Pilaster to be supported and frame with 50mm diameter vertical post with circular vertical poll foot and Intermediate panel is anchored to the wall with powder coating or anodized aluminium U & F Channel. Door panel should be fixed by 80mm diameter vertical post with noise deafening tape. All screws will of 304 Grade in stainless steel with satin finish.	RORSO BY STYLAM						
1.01	Toilet Cubicle with standard dimension of 2055mm Height x 1000mm Width x 1550mm Depth, which includes 600mm door size width).							
1.02	Toilet Cubicle I-Shape (Front Partition) with standard dimension of 2055mm Height x 1000mm Width which includes 600mm door size width).							



#### ZONA

#### BILL OF QUANTITIES FOR TOILET BLOCK WORK

C NO	ITEM DESCRIPTION	APPROVED	BASIC	REMARKS	QUANTITY	LINUT	DATE	AMOUNT
S. NO.	ITEM DESCRIPTION	MAKE	PRICE	FLOOR	TOTAL	UNIT	RATE	AMOUNT
1.00	PARTITIONS AND ASSOCIATED WORKS							
1.00	Toilet Cubical							
	"Providing & fixing STYLAM CUBOID ZONA Toilet Cubicle (of following standard dimension which includes 600mm door size width) made of heat, bacteria, water, chemical, scratch, impact and anti bacterial resistant 12mm thick solid compact laminate panels tested by national test house. Finish of the compact laminate should be Suede, which includs doors, pilasters & intermediate panels finished with approved texture/shade as per the detail drawings & as per IS 2046 (Indian Standard) and as per fire retardant BS-476/97 standard. The product should have Green Guard Certificate.  This also includes providing and fixing in position necessary hardware made out of Nylon Polyamide Grade-6 & Aluminium powder coated top rail as per manufacturer's specifications & Architects instructions like (1) D Post Door Channel (anodized), (2) Hinges Adaptors, (3) Gravity Hinges (4) Privacy Thumbturn c/w Occupancy Indicator, (5) Coat Hook, (6) Door Knob, (7) Noise Deafening Tape (8) Screws & wall Plugs.  All the hardware shall be made of polyamide-6 material. Aluminium D-Post channel of 40mm dia which should be fixed to the wall with SS-304 screws, Door is gripped with the poles by an arrangement of hinge adaptor & hinges. Aluminium poles are incorporated with the rubber strip to reduce the noise effect. "	ZONA BY STYLAM						
1.01	Toilet Cubicle with standard dimension of 1980mm Height x 600mm to 900mm Width.					Nos		

\*Raw silk finish is available on special demand.

















NCRTC (Delhi - Meerut Rail)

AAI (Gwalior, Jodhpur)

(Sabarmati Railway Station)

CPWD (Central Vista Project)

Railway (New Delhi, Ghaziabad & More)



VENUS REMEDIES















Maharishi Markandeshwar University (Mullana) Plaksha University



OP Jindal Global University

Punjab Engineering College



Comfort Inn



AIIMS (BILASPUR)

Central Park 67 (Mohali (Cp67)) BHEL (Noida 16 Office)



Netsmartz



ELANTE MALL (CHANDIGARH)



SAMSUNG